


Colour	White
Binder	Pure PTFE
Temperature	
Min	-212°C (-350°F)
Max	316°C (600°F)
Continuous, Max	260°C (500°F)
Pressure, max, bar (psi)	124 (1,800)
Density, g/cc (lbs/ft <sup>3</sup> )	0.8 (49.9)
Compressibility, % ASTM F36	40-60
Recovery, % ASTM F36	12
Creep Relaxation, % ASTM F38	30
Nitrogen Sealability, cc/min ASTM 2378	0.01

Note: ASTM properties are based on 1/16" sheet thickness, except ASTM F38 which is based on 1/32" sheet thickness. This is a general guide only and should not be the sole means of accepting or rejecting this material. The data listed here falls within the normal range of product properties, but should not be used to establish specifications limits nor used alone as the basis of design. For applications above Class 300, contact our technical department.

- ABS-PDA Certificate (American Bureau of Shipping)

Durlon® 9600 is made with only pure PTFE resins. It is suitable for use in steel flanges, as well as flanges where a highly compressible gasket is required. Durlon® 9600 is also suitable for sealing flanges with irregular surfaces. It will not exhibit the cold flow problems associated with virgin PTFE, or the hardness problems of some filled PTFE products. It has excellent sealability, cuts easily and separates cleanly from flanges after use. This material conforms to FDA.

Durlon® 9600 is an expanded PTFE gasket material designed for use in process piping and equipment, in chemical, pulp and paper, food and beverage and other general industrial applications where resistance to highly aggressive chemicals is required.

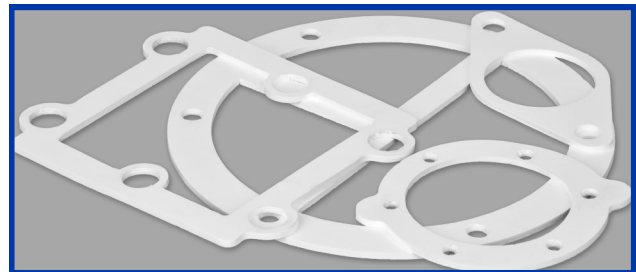

Warning: Durlon® gasket materials should never be recommended when both temperature and pressure are at the maximum listed. Properties and applications stated are typical. No applications should be undertaken by anyone without independent study and evaluation for suitability. Never use more than one gasket in one flange joint and never reuse a gasket. Improper use or gasket selection could cause property damage and/or serious injury. Data reported is a compilation of field testing, field service reports and/or in-house testing. While the utmost care has gone into publishing the information contained herein, we assume no responsibility for errors. Specifications and information contained in this flyer are subject to change without notice. This edition cancels and obsoletes all previous editions.

Gasket Factors		
	1/16"	1/8"
G <sub>b</sub> , psi (MPa)	1,200 (8.3)	1,400 (9.6)
a	0.2	0.2
G <sub>s</sub> , psi (MPa)	3.5 (0.024)	1.5 (0.01)

Download iGasket® on your smartphone today!

