




Durlon<sup>®</sup> RCA sealing system combined with Durlon<sup>®</sup> PTFE styles can replace standard full gaskets in FRP, PVC and other non-metallic and metallic pipe flanges where a low stress gasket is required. The RCA configuration can be cut from standard sheets resulting in a cost savings versus other low stress gaskets.

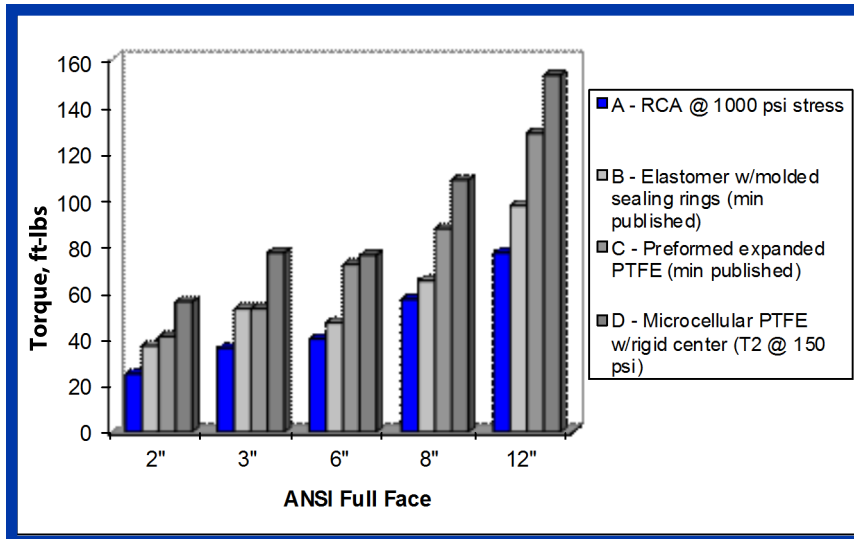

- Available materials: 1/16" and 1/8" Durlon<sup>®</sup> PTFE styles and 1/16" compressed asbestos-free styles
- For FRP, PVE, Glass Lined or steel flanges where a low stress gasket is required
- Reduced Contact Area means a lower seating stress
- Lower sealing stress versus standard full face gaskets
- Available sizes: 1" to 24" Class 150 full face RCA
- Significant cost savings-cut from standard Durlon<sup>®</sup> sheet
- RCA full face replaces standard full face gaskets
- Alignment guides for easy positioning during installation
- Identification tabs extend beyond the flange OD so even when bolted up you know the size and gasket material being used



Download iGasket<sup>®</sup> on your smartphone today!

© A registered trademark of Triangle Fluid Controls Ltd.

Durlon RCA REV 2015-10

t - 613.968.1100  
f - 613.968.1099  
tf - 866.537.1133



**Triangle Fluid Controls Ltd.<sup>®</sup>**

Belleville, ON  
CANADA

info@trianglefluid.com  
www.trianglefluid.com