

## 9000N

Inorganic Filler with Pure PTFE Resins  
Filled PTFE Gasket Material  
ASTM F104: F452111-A9B5E11K6M6



Durlon® 9000N is for use in general industrial applications where resistance to highly aggressive chemicals is required. In addition, the shape of the fillers does not allow wicking, which can cause corrosion on flange surfaces.

### INDUSTRY APPLICATIONS:

- Chemical Processing
- Mining
- Power Generation
- Food & Beverage
- OEM Services
- Pulp & Paper
- General Industry
- Oil & Gas
- Water & Wastewater
- Marine
- Pharmaceutical


Physical Properties	
Color	White
Filler System	Inorganic
Temp.:	
Min	-212°C (-350°F)
Max	271°C (520°F)
Continuous, Max	260°C (500°F)
Pressure, max, bar (psi)	103 (1,500)
Density, g/cc (lbs/ft³)	2.2 (138)
Compressibility, %	8-16
Recovery, %	40
Creep Relaxation, %	30
Tensile Strength, MPa (psi)	13.8 (2,000)
Sealability ASTM 2378 (Nitrogen)	0.01 cc/min
Volume Resistivity, ohm-cm ASTM D257	1.0 x 10 <sup>5</sup>
Dielectric Breakdown ASTM D149, kV/mm (V/mil)	16 (406)

Gasket Factors	1/16"	1/8"
m	2.2	4.6
Y psi (MPa)	1,937 (13.4)	1,639 (11.3)
G <sub>b</sub> psi (MPa)	639 (4.4)	495 (3.4)
a	0.220	0.262
G <sub>s</sub> psi (MPa)	55 (0.379)	65 (0.448)

**Warning:** Durlon® gasket materials should never be recommended when both temperature and pressure are at the maximum listed. Properties and applications stated are typical. No applications should be undertaken by anyone without independent study and evaluation for suitability. Never use more than one gasket in one flange joint and never reuse a gasket. Improper use or gasket selection could cause property damage and/or serious injury. Data reported is a compilation of field testing, field service reports and/or in-house testing. While the utmost care has gone into publishing the information contained herein, we assume no responsibility for errors. Specifications and information contained within are subject to change without notice. This edition cancels and obsoletes all previous editions.

Durlon is a registered trademark of Triangle Fluid Controls Ltd. and Gasket Resources Inc. • Triangle Fluid Controls Ltd., Belleville, ON, Canada • [trianglefluid.com](http://trianglefluid.com) • [info@trianglefluid.com](mailto:info@trianglefluid.com) • Toll-free: 866-537-1133  
Gasket Resources Inc., Downingtown, PA, USA • [gasketresources.com](http://gasketresources.com) • [tech@gasketresources.com](mailto:tech@gasketresources.com) • Toll-free: 866-707-7300 - REV. 2020/10/16

Certifications	
USP Class VI	Met requirements for Plastic Class VI - 121°C (250°F)
FDA	Conforms to the requirements of 21 CFR 177.1550 for food and drug contact
ABS-PDA & Pamphlet 95	Approved Material, chlorine ins., DNV-GL
(EC) 1935/2004 & EU (10/2011)	Approved Material

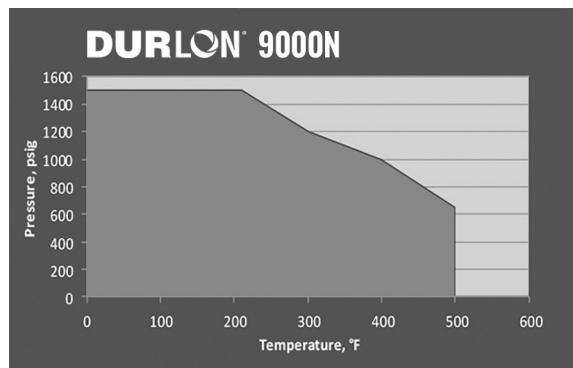

**Note:** ASTM properties are based on 1/16" sheet thickness, except ASTM F38 which is based on 1/32" sheet thickness. This is a general guide only and should not be the sole means of accepting or rejecting this material. The data listed here falls within the normal range of product properties, but should not be used to establish specifications limits nor used alone as the basis of design. For applications above Class 300, contact our technical department.



Durlon® 9000N is made with Teflon™ fluoropolymer. Teflon™ is a trademark of The Chemours Company FC, LLC used under license by Triangle Fluid Controls Ltd.