


GLC® - NAB

The **DFT® GLC® NAB (Nickel-Aluminum Bronze) Silent Check Valve** is a spring-assisted, nozzle style, non-slam check valve that is designed to withstand the harsh environments of salt and brackish water applications where corrosion resistance and marine life deterrents are a must. DFT's center guided check valves provide reliable, low-maintenance service and solve the problems associated with water hammer and severe applications and environments.

FEATURES:

- "Short" Face-to-Face dimensions
- Standard body materials:
 - Nickel-Aluminum Bronze
- One-piece body
- Spring-assisted silent closing, non-slam
- Center-guided
- Dual-guided stem
- Horizontal or vertical installation
- Protected spring
- Easy maintenance
- Versatile
- ASME Class 150 & 300
 - 1" to 24" Line size
 - Flat face flanged ends
 - MSS-SP61 seat leakage
- Axial flow
- Nozzle style
- Options:
 - Inconel® X-750 Spring
- Soft seat (for bubble-tight shutoff)
- Custom sizing low flow
- Severe service trim
- Stellite® trim
- Trim Options:
 - Nickel-Aluminum Bronze
 - Monel®
 - Stainless Steel
 - Duplex SS

For more information see GLC® page 24-25

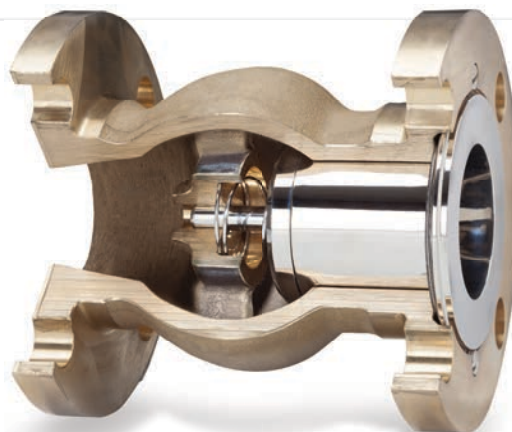


Excalibur® - NAB

The **DFT® Excalibur® NAB (Nickel-Aluminum Bronze) Silent Check Valve** is a spring-assisted, nozzle style, non-slam check valve that is designed to withstand the harsh environments of salt and brackish water applications where corrosion resistance and marine life deterrents are a must. DFT's center guided check valves provide reliable, low-maintenance service and solve the problems associated with water hammer and severe applications and environments.

FEATURES:

- ASME B16.10 Face-to-Face dimensions
- Spring-assisted silent closing, non-slam
- 2" to 24" Line size
- ASME Class 150 & 300
- Standard body materials:
 - Nickel-Aluminum Bronze
- Standard ends:
 - Flat face flanged
- Optional ends:
 - Butt weld
- Flanged x Butt weld
- Raised face
- Center-guided
- Dual-guided stem
- Horizontal or vertical installation
- Tight shutoff
- Two-piece body
- Protected spring
- Easy maintenance
- Versatile
- Axial flow
- Nozzle style
- Options:
 - Soft seat (for bubble-tight shutoff)
 - Inconel® X-750 Spring
 - Custom sizing low flow
 - Severe service trim
 - Stellite® trim
- Trim Options:
 - Nickel-Aluminum Bronze
 - Monel®
 - Stainless Steel
 - Duplex SS

For more information see Excalibur® page 22-23

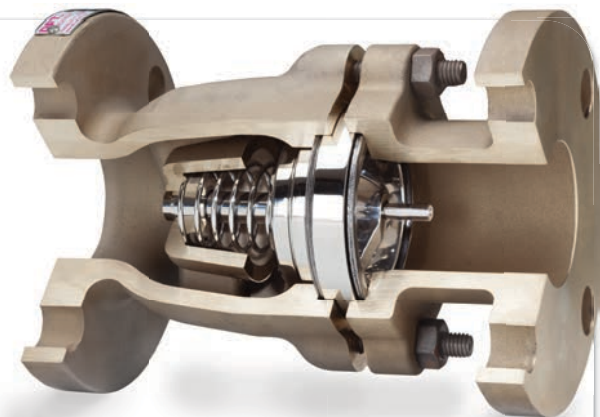

All dimensions are in inches. Weights are in pounds. For metric measurements, visit www.dft-valves.com. CP: Cracking Pressure (psig)